

Ultima SVJ



- High Speed Servo Driven Jaws
- User-friendly, upgraded Allen-Bradley control system with color touch screen operator interface
- Heavy-duty jaw assembly houses a cushion for shock and noise abatement
- Servo driven self centering pull belts
- More dwell time for better looking seals and increased packaging speeds using independent stager/cooler
- Patented Measure, Form, Pull film advance concept
- Open frame for ease of access

Ultima SVJ

The Ultima SVJ has a long-standing reputation as a solid, durable member of the Hayssen family of VFFS machines.

The Ultima SVJ's servo driven system features off-the-shelf Allen-Bradley controls. Sealing systems for laminate and polyethylene packaging materials can be customized to meet your application requirements. Higher sanitation features available.

Production Rate

Up to 120 bags per minute

Package Range

Minimum Width: 2-1/8" (54mm)

Minimum Length: 3" (76mm)

Maximum Width: 8" to 18" (203 to 457mm) depending on frame size

Maximum Length: 8" to 28" (203 to 711mm) depending on frame size

Power Requirements



230/460 vac, single phase, 50/60 hz, 30 amp service

Air Requirements


2.5 scfm @ 65 psi

Let us customize an Ultima SVJ to meet your specific requirements, whether it is a specific bag style or a production need the Ultima SVJ is a proven performer.

A few of the many available options include stainless steel construction, integrated zipper applicator, various hole punches, tear notches, code daters, gas flushing, static eliminators and tucking devices. We have extensive experience in integrated systems through a wide variety of feed systems including scales, augers, volumetrics and pumps for a wide variety of applications.

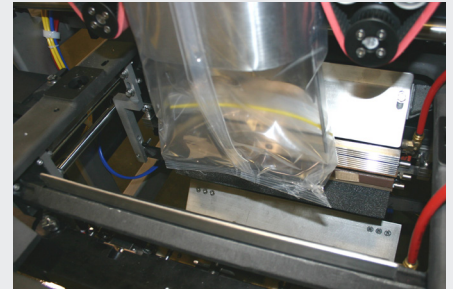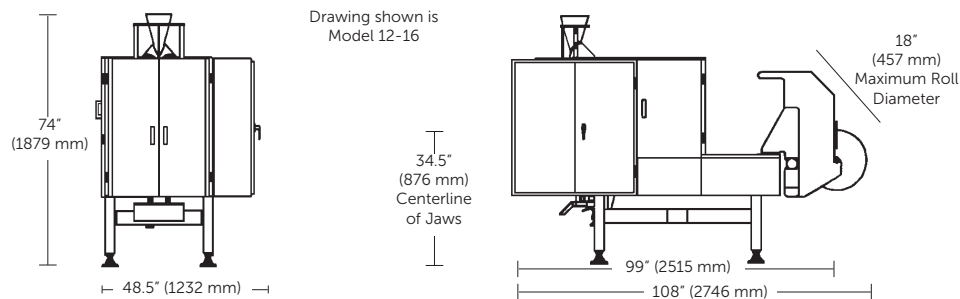

Consistent High Quality Seals

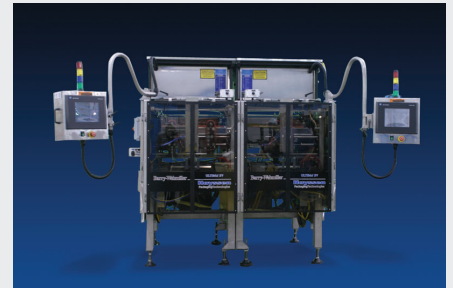

Twin SV System

Hayssen | Hudson-Sharp | Rose Forgrove | Sandiacre | Schib | Simionato | Symach | Thiele