

Schib CO 90



Features

- Hygienic and easy-to-clean design suitable for a wide 450 mm film width range of challenging industries
- Tool-less removal of guarding and in-feed catch trays allows easy access for cleaning
- Fast format changeover with minimal downtime
- Allen-Bradley programmable automation controller (other electronic platforms on demand)
- 10" color touch screen offering user-friendly HMI functionality
- Icon-based operator interface with real time diagnostics

- All product contact parts are made of stainless steel or food grade plastics
- Stainless steel version on demand
- Independent temperature control circuits incorporated into the control panel
- Automatic multi-belt feeders are available on demand
- Ideal machine for integration into fully automated packaging systems




Schib CO 90

The State-of-the-Art Schib CO 90 is a horizontal flow wrapper suitable for a wide range of packaging applications. It offers solid construction and easy-to-clean design, as well as exceptional performances.

The CO 90 can come as a stand-alone machine or pre-arranged for integration into completely automated packaging systems.


Automatic feeders and product conveying/handling devices are available on demand. Options include twin jaws configuration, automatic film splicer, motorized film prefeed, reel run out sensor, pre-printed film registration, no product - no bag function to minimize film waste, Plexiglas guarding for quick inspection, remote service device, and many others.

Feature	Standard	Optional
Min./Max. product dimensions	Length 50 / 200 mm Width 5 / 80 mm Height 1 / 60 mm	
Performance	500 ppm	Up to 800 ppm
Film roll width and max. ext. dia	450 mm / 350 mm	
Drive	3 servo + 2 asynchronous motors	Up to 16
Sealing head	Rotary jaws	D-Cam
In-feed conveyor useful length	1000 mm	On request
Automatic film splicer	No	Yes
Plexiglas guarding	No	Yes
Control panel	10" color touch-screen	
Program memory	40 programs	99
Diagnostics	Yes	
Machine finishing	Painted RAL 9007	Stainless steel
No product - no bag	No	Yes
Wrapping materials	Heat sealable OPP - BOPP - COEX - Laminate	LDPE - HDPE - Polyolefin - Cold sealable films
Installed / absorbed power	6 / 2 kW	
Weight	1200 kg	
Feeding system	Manual	Automatic
Machine dimensions	4777 x 1260 x 1800 mm	
We reserve the right to make technical changes without prior notice.		

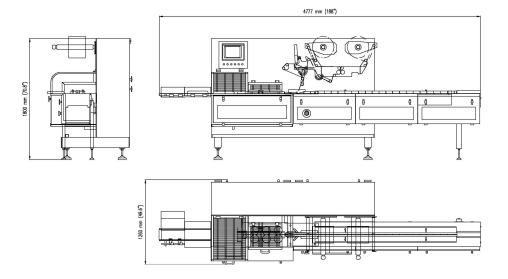



Automatic Feeder (option)



Pack Variations



Automatic Film Splicing (option)

BW Flexible Systems 225 Spartangreen Blvd. Duncan | SC | 29334 UNITED STATES t. +1 (864) 486 4000 bwflexiblesystems.com

BW Flexible Systems UK Ltd. 101 Lilac Grove | Nottingham | NG9 1PF UNITED KINGDOM t. +44 (0) 115 967 8787

bwflexiblesystems.com

Hayssen Flexible Systems S.r.l Via Trieste, 53 | Mestrino (PD) | 35035 ITALY t. +39 049 9006511

hayssen.com

Schib Packaging S.r.l. Viale del Lavoro, 7/9 A Monte di Malo (VI) | 36030 **ITALY** t. +39 0445 602300

schib.it

Hayssen | Hudson-Sharp | Rose Forgrove | Sandiacre | Schib | Simionato | Symach | Thiele

