Schib CO 50 BB



Features

- Rotary motion HFFS technology
- Bottom film feed
- Hygienic and easy-to clean design suitable for a wide range of food and non-food products
- 7" color touch screen offering user-friendly HMI functionality
- Icon-based operator interface with real time diagnostics

- 500 mm film width (700 mm as an option)
- All product contact parts are made of stainless steel or food grade plastic
- Stainless steel version on demand
- Independent temperature control circuits incorporated into the control panel
- Product-specific infeed and automatic feeders are available on demand



Schib CO 50 BB

The Schib CO 50 BB inverted horizontal flow wrapper features rotary motion HFFS technology.


Extremely flexible and dependable, the machine is suited for a wide range of food and non-food products, both for single pack or multi-packing.

Bottom film feed makes it a perfect machine for packaging difficult-to-handle items such as soft, sticky, or heavy products.

Full servo version as standard with three independent drives for product infeed, longitudinal sealing rollers and rotary sealing head, respectively.

Options include twin jaws configuration, reel run out sensor or automatic film splicer, motorized film pre-feed, pre-printed film registration, no product - no bag function, and many other accessories.

Feature	Standard	Optional
Min/Max product length	50 /630 mm	Length > 1500 mm
Min/Max product width	10 / 200 mm	Width 5 / 300 mm
Min/Max product height	Height 10 / 150 mm	
Performance	200 ppm	
Film roll width	500 mm	700 mm
Film roll max. ext. diameter	350 mm	
Drive	3 axes	
Sealing head	Rotary jaws	Box-motion, long-dwell
In-feed conveyor useful length	1500 mm	On request
Automatic film splicer	No	Yes
НМІ	7" color touch-screen	
Program storage	40 programs	Expandable
Machine finishing	Painted RAL 9007	Stainless steel
Wrapping materials	Heat sealable OPP - BOPP - COEX - laminate	LDPE - HDPE - polyolefin - cold sealable films
Installed / absorbed power	4 / 1,5 kW	
Weight	1050 kg	
Feeding system	Manual	Automatic
Machine dimensions	4700 x 1305 x H 1465 mm	
We reserve the right to make technic	al changes without prior notice.	-

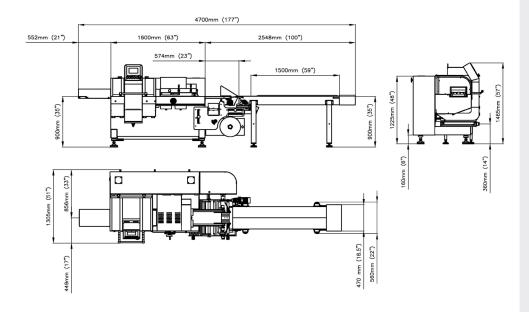



Rotary Crimper for End Seals



Overhead Long Seal Unit



Bottom Film Feed

BW Flexible Systems 225 Spartangreen Blvd. Duncan | SC | 29334 UNITED STATES t. +1 (864) 486 4000 bwflexiblesystems.com

BW Flexible Systems UK Ltd. 101 Lilac Grove | Nottingham | NG9 1PF UNITED KINGDOM t. +44 (0) 115 967 8787

bwflexiblesystems.com

Hayssen Flexible Systems S.r.l Via Trieste, 53 | Mestrino (PD) | 35035 ITALY t. +39 049 9006511

hayssen.com

Schib Packaging S.r.l. Viale del Lavoro, 7/9 A Monte di Malo (VI) | 36030 **ITALY** t. +39 0445 602300

schib.it

Hayssen | Hudson-Sharp | Rose Forgrove | Sandiacre | Schib | Simionato | Symach | Thiele

